





MOOD 2.0 COLLECTION OPTIONS

COLORS:

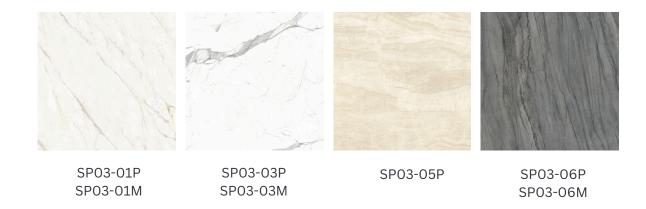

FINISHES: MATTE (M) & POLISHED (P)

SIZE:







MOOD 2.0 PERFORMANCE DATA























Porcelain Stoneware

Floor

Wall

Slight Variation

DCOF Compliant

Thickness 6mm

ss Rectifie Tile

No V.O.C.

Frost Low Water Proof Absorption

Water USA orption Made/Stock

Technical Feature	Method	Value Required ASNI A 137.1	Studio Collection Results
Facial Dimension	ASTM C-499	± 0.25% or ± 0.03 in	≤±0.25%
Wedging	ASTM C-502	± 0.25% or ± 0.03 in	≤ ±0.25%
Thickness	ASTM C-499	Range: 0.040 inch max	≤±0.02 inches
Water Absorption	ASTM C-373	≤ 0.5%	≤ 0.1%
Breaking Strength	ASTM C-648	≥ 250 lbs (≥ 1113N)	≥ 200 lb
Freeze thaw	ASTM C-1026	No damages	No Evidence Of Damage
Chemical Resistance	ASTM C-650	As reported	Class A
Dynamic Coefficient of Friction	ANSI A 326.3	≥ 0.42	≥ 0.42

MOOD 2.0

